



TOGGLE PADS - SOCKET


The IEC Socket Toggle Pad features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. The threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provide a low-friction support interface. Standard steel finish is corrosion resistant zinc-plated gold irridite. Other finishes available upon request.

Features

- Steel/stainless steel options
- Integrated ball and socket
- White Delrin (nylon) base option
- Black delrin available as custom item (change to -BD)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Fixtures / Tooling



TOGGLE PADS - STEEL & STAINLESS STEEL SOCKET

Steel	Stainless	Load	A	B	C	D	F	G
IL61-4G	IL61-4S	100	1/4-20	1/2	5/8	3/4	3/8	3/16
IL61-5G	IL61-5S	500	5/16-18	1/2	5/8	3/4	3/8	3/16
IL61-6G	IL61-6S	1000	3/8-16	1/2	5/8	3/4	3/8	3/16
IL61-7G	IL61-7S	2000	1/2-13	1/2	15/16	3/4	3/8	1/2
IL61-8G	IL61-8S	3000	5/8-11	5/8	1-1/8	3/4	1/2	5/8
IL61-9G	IL61-9S	4000	3/4-10	3/4	1-3/16	3/4	5/8	11/16
IL61-10G	IL61-10S	5000	1-8	1	1-1/4	3/4	11/16	3/4
IL63-4G	IL63-4S	100	1/4-20	1/2	5/8	1-1/4	3/8	3/16
IL63-5G	IL63-5S	500	5/16-18	1/2	5/8	1-1/4	3/8	3/16
IL63-6G	IL63-6S	1000	3/8-16	1/2	5/8	1-1/4	3/8	3/16
IL63-7G	IL63-7S	2000	1/2-13	1/2	15/16	1-1/4	3/8	1/2
IL63-8G	IL63-8S	3000	5/8-11	5/8	1-1/8	1-1/4	1/2	5/8
IL63-9G	IL63-9S	4000	3/4-10	3/4	1-3/16	1-1/4	5/8	11/16
IL63-10G	IL63-10S	5000	1-8	1	1-1/4	1-1/4	11/16	3/4

To order with 1/8" black rubber pad, (add "-P").



white base is delrin® plastic.


TOGGLE PADS (Delrin Base) - STEEL/STAINLESS STEEL SOCKET

Steel	Stainless	Load	A	B	C	D	F	G
IL61-4G-WD	IL61-4S-WD	100	1/4-20	1/2	5/8	3/4	3/8	3/16
IL61-5G-WD	IL61-5S-WD	300	5/16-18	1/2	5/8	3/4	3/8	3/16
IL61-6G-WD	IL61-6S-WD	500	3/8-16	1/2	5/8	3/4	3/8	3/16
IL61-7G-WD	IL61-7S-WD	750	1/2-13	1/2	15/16	3/4	3/8	1/2
IL61-8G-WD	IL61-8S-WD	1000	5/8-11	5/8	1-1/8	3/4	1/2	5/8
IL61-9G-WD	IL61-9S-WD	1250	3/4-10	3/4	1-3/16	3/4	5/8	11/16
IL61-10G-WD	IL61-10S-WD	1500	1-8	1	1-1/4	3/4	11/16	3/4
IL63-4G-WD	IL63-4S-WD	100	1/4-20	1/2	5/8	1-1/4	3/8	3/16
IL63-5G-WD	IL63-5S-WD	300	5/16-18	1/2	5/8	1-1/4	3/8	3/16
IL63-6G-WD	IL63-6S-WD	500	3/8-16	1/2	5/8	1-1/4	3/8	3/16
IL63-7G-WD	IL63-7S-WD	750	1/2-13	1/2	15/16	1-1/4	3/8	1/2
IL63-8G-WD	IL63-8S-WD	1000	5/8-11	5/8	1-1/8	1-1/4	1/2	5/8
IL63-9G-WD	IL63-9S-WD	1250	3/4-10	3/4	1-3/16	1-1/4	5/8	11/16
IL63-10G-WD	IL63-10S-WD	1500	1-8	1	1-1/4	1-1/4	11/16	3/4



TOGGLE PADS - METRIC SOCKET

The IEC Metric Socket Toggle Pad features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. The threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provide a low-friction support interface. Standard steel finish is corrosion resistant zinc-plated gold irridite. Other finishes available upon request.

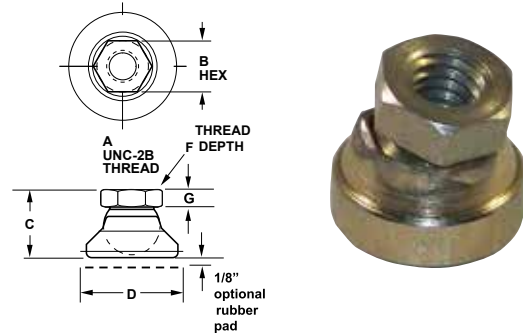

Features

- Steel/stainless steel options
- Integrated ball and socket
- White Delrin (nylon) base option
- Black delrin available as custom item (change to -BD)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Fixtures / Tooling



METRIC TOGGLE PADS - STEEL & STAINLESS STEEL SOCKET

Steel	Stainless	Load	A	B	C	D	F	G
IL61-M6G	IL61-M6S	100	M6x1	1/2	5/8	3/4	3/8	3/16
IL61-M8G	IL61-M8S	500	M8x1.25	1/2	5/8	3/4	3/8	3/16
IL61-M10G	IL61-M10S	1000	M10x1.50	1/2	5/8	3/4	3/8	3/16
IL61-M12G	IL61-M12S	2000	M12x1.75	1/2	15/16	3/4	3/8	1/2
IL61-M16G	IL61-M16S	3000	M16x2.00	5/8	1-1/8	3/4	1/2	5/8
IL61-M20G	IL61-M20S	4000	M20x2.50	3/4	1-3/16	3/4	5/8	11/16
IL61-M24G	IL61-M24S	5000	M24x3.00	1	1-1/4	3/4	11/16	3/4
IL63-M6G	IL63-M6S	100	M6x1	1/2	5/8	1 1/4	3/8	3/16
IL63-M8G	IL63-M8S	500	M8x1.25	1/2	5/8	1 1/4	3/8	3/16
IL63-M10G	IL63-M10S	1000	M10x1.50	1/2	5/8	1 1/4	3/8	3/16
IL63-M12G	IL63-M12S	2000	M12x1.75	1/2	15/16	1 1/4	3/8	1/2
IL63-M16G	IL63-M16S	3000	M16x2.00	5/8	1-1/8	1 1/4	1/2	5/8
IL63-M20G	IL63-M20S	4000	M20x2.50	3/4	1-3/16	1 1/4	5/8	11/16
IL63-M24G	IL63-M24S	5000	M24x3.00	1	1-1/4	1 1/4	11/16	3/4

To order with 1/8" black rubber pad, (add "-P").



white base is delrin® plastic.

METRIC TOGGLE PADS (Delrin Base) - STEEL/STAINLESS STEEL SOCKET

Steel	Stainless	Load	A	B	C	D	F	G
IL61-M6G-WD	IL61-M6S-WD	100	M6x1	1/2	5/8	3/4	3/8	3/16
IL61-M8G-WD	IL61-M8S-WD	300	M8x1.25	1/2	5/8	3/4	3/8	3/16
IL61-M10G-WD	IL61-M10S-WD	500	M10x1.50	1/2	5/8	3/4	3/8	3/16
IL61-M12G-WD	IL61-M12S-WD	750	M12x1.75	1/2	15/16	3/4	3/8	1/2
IL61-M16G-WD	IL61-M16S-WD	1000	M16x2.00	5/8	1-1/8	3/4	1/2	5/8
IL61-M20G-WD	IL61-M20S-WD	1250	M20x2.50	3/4	1-3/16	3/4	5/8	11/16
IL61-M24G-WD	IL61-M24S-WD	1500	M24x3.00	1	1-1/4	3/4	11/16	3/4
IL63-M6G-WD	IL63-M6S-WD	100	M6x1	1/2	5/8	1 1/4	3/8	3/16
IL63-M8G-WD	IL63-M8S-WD	300	M8x1.25	1/2	5/8	1 1/4	3/8	3/16
IL63-M10G-WD	IL63-M10S-WD	500	M10x1.50	1/2	5/8	1 1/4	3/8	3/16
IL63-M12G-WD	IL63-M12S-WD	750	M12x1.75	1/2	15/16	1 1/4	3/8	1/2
IL63-M16G-WD	IL63-M16S-WD	1000	M16x2.00	5/8	1-1/8	1 1/4	1/2	5/8
IL63-M20G-WD	IL63-M20S-WD	1250	M20x2.50	3/4	1-3/16	1 1/4	5/8	11/16
IL63-M24G-WD	IL63-M24S-WD	1500	M24x3.00	1	1-1/4	1 1/4	11/16	3/4



TOGGLE PADS - STUD (SWIVEL SET SCREWS)


The IEC Stud Toggle Pad features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. The threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provide a low-friction support interface. Standard steel finish is corrosion resistant zinc-plated gold irridite. Other finishes available upon request.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Fixtures
- Tooling



TOGGLE PADS - STEEL & STAINLESS STEEL STUD

Steel	Stainless	Load	A	B	C	D	E	F	G
IL60-4Gx1	IL60-4Sx1	100	1/4-20	1/2	3/4	3/4	1-3/4	1	3/16
IL60-4Gx15	IL60-4Sx15	100	1/4-20	1/2	3/4	3/4	2-1/4	1-1/2	3/16
IL60-5Gx1	IL60-5Sx1	500	5/16-18	1/2	3/4	3/4	1-3/4	1	3/16
IL60-4G	IL60-4S	100	1/4-20	1/2	3/4	3/4	2-3/4	2	3/16
IL60-5G	IL60-5S	500	5/16-18	1/2	3/4	3/4	2-3/4	2	3/16
IL60-6G	IL60-6S	1000	3/8-16	1/2	3/4	3/4	2-3/4	2	3/16
IL60-7G	IL60-7S	2000	1/2-13	1/2	3/4	3/4	2-3/4	2	3/16
IL60-8G	IL60-8S	3000	5/8-11	5/8	3/4	3/4	2-3/4	2	3/16
IL60-9G	IL60-9S	4000	3/4-10	3/4	3/4	3/4	2-3/4	2	3/16
IL60-10G	IL60-10S	5000	1-8	1	1	3/4	3	2	1/2
IL60-4Gx3	IL60-4Sx3	100	1/4-20	1/2	3/4	3/4	3-3/4	3	3/16
IL60-5Gx3	IL60-5Sx3	500	5/16-18	1/2	3/4	3/4	3-3/4	3	3/16
IL60-6Gx3	IL60-6Sx3	1000	3/8-16	1/2	3/4	3/4	3-3/4	3	3/16
IL60-7Gx3	IL60-7Sx3	2000	1/2-13	1/2	3/4	3/4	3-3/4	3	3/16
IL60-8Gx3	IL60-8Sx3	3000	5/8-11	5/8	3/4	3/4	3-3/4	3	3/16
IL60-9Gx3	IL60-9Sx3	4000	3/4-10	3/4	3/4	3/4	3-3/4	3	3/16
IL60-10Gx3	IL60-10Sx3	5000	1-8	1	1	3/4	4	3	1/2
IL60-5Gx4	IL60-5Sx4	500	5/16-18	1/2	3/4	3/4	4-3/4	4	3/16
IL60-6Gx4	IL60-6Sx4	1000	3/8-16	1/2	3/4	3/4	4-3/4	4	3/16
IL60-7Gx4	IL60-7Sx4	2000	1/2-13	1/2	3/4	3/4	4-3/4	4	3/16
IL60-8Gx4	IL60-8Sx4	3000	5/8-11	5/8	3/4	3/4	4-3/4	4	3/16
IL60-9Gx4	IL60-9Sx4	4000	3/4-10	3/4	3/4	3/4	4-3/4	4	3/16
IL60-10Gx4	IL60-10Sx4	5000	1-8	1	1	3/4	5	4	1/2
IL60-6Gx5	IL60-6Sx5	1000	3/8-16	1/2	3/4	3/4	5-3/4	5	3/16
IL60-7Gx5	IL60-7Sx5	2000	1/2-13	1/2	3/4	3/4	5-3/4	5	3/16
IL60-8Gx5	IL60-8Sx5	3000	5/8-11	5/8	3/4	3/4	5-3/4	5	3/16
IL60-9Gx5	IL60-9Sx5	4000	3/4-10	3/4	3/4	3/4	5-3/4	5	3/16
IL60-10Gx5	IL60-10Sx5	5000	1-8	1	1	3/4	6	5	1/2
IL60-6Gx6	IL60-6Sx6	1000	3/8-16	1/2	3/4	3/4	6-3/4	6	3/16
IL60-7Gx6	IL60-7Sx6	2000	1/2-13	1/2	3/4	3/4	6-3/4	6	3/16
IL60-8Gx6	IL60-8Sx6	3000	5/8-11	5/8	3/4	3/4	6-3/4	6	3/16
IL60-9Gx6	IL60-9Sx6	4000	3/4-10	3/4	3/4	3/4	6-3/4	6	3/16
IL60-10Gx6	IL60-10Sx6	5000	1-8	1	1	3/4	7	6	1/2
IL60-7Gx8	IL60-7Sx8	2000	1/2-13	1/2	3/4	3/4	8-3/4	8	3/16
IL60-8Gx8	IL60-8Sx8	3000	5/8-11	5/8	3/4	3/4	8-3/4	8	3/16
IL60-9Gx8	IL60-9Sx8	4000	3/4-10	3/4	3/4	3/4	8-3/4	8	3/16
IL60-10Gx8	IL60-10Sx8	5000	1-8	1	1	3/4	9	8	1/2



TOGGLE PADS - STUD (SWIVEL SET SCREWS)


The IEC Stud Toggle Pad features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. The threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provide a low-friction support interface. Standard steel finish is corrosion resistant zinc-plated gold irridite. Other finishes available upon request.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Fixtures
- Tooling



TOGGLE PADS - STEEL & STAINLESS STEEL STUD

Steel	Stainless	Load	A	B	C	D	E	F	G
IL62-4Gx1	IL62-4Sx1	100	1/4-20	1/2	3/4	1-1/4	1-3/4	1	3/16
IL62-4Gx15	IL62-4Sx15	100	1/4-20	1/2	3/4	1-1/4	2-1/4	1-1/2	3/16
IL62-5Gx1	IL62-5Sx1	500	5/16-18	1/2	3/4	1-1/4	1-3/4	1	3/16
IL62-4G	IL62-4S	100	1/4-20	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-5G	IL62-5S	500	5/16-18	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-6G	IL62-6S	1000	3/8-16	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-7G	IL62-7S	2000	1/2-13	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-8G	IL62-8S	3000	5/8-11	5/8	3/4	1-1/4	2-3/4	2	3/16
IL62-9G	IL62-9S	4000	3/4-10	3/4	3/4	1-1/4	2-3/4	2	3/16
IL62-10G	IL62-10S	5000	1-8	1	1	1-1/4	3	2	1/2
IL62-4Gx3	IL62-4Sx3	100	1/4-20	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-5Gx3	IL62-5Sx3	500	5/16-18	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-6Gx3	IL62-6Sx3	1000	3/8-16	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-7Gx3	IL62-7Sx3	2000	1/2-13	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-8Gx3	IL62-8Sx3	3000	5/8-11	5/8	3/4	1-1/4	3-3/4	3	3/16
IL62-9Gx3	IL62-9Sx3	4000	3/4-10	3/4	3/4	1-1/4	3-3/4	3	3/16
IL62-10Gx3	IL62-10Sx3	5000	1-8	1	1	1-1/4	4	3	1/2
IL62-5Gx4	IL62-5Sx4	500	5/16-18	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-6Gx4	IL62-6Sx4	1000	3/8-16	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-7Gx4	IL62-7Sx4	2000	1/2-13	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-8Gx4	IL62-8Sx4	3000	5/8-11	5/8	3/4	1-1/4	4-3/4	4	3/16
IL62-9Gx4	IL62-9Sx4	4000	3/4-10	3/4	3/4	1-1/4	4-3/4	4	3/16
IL62-10Gx4	IL62-10Sx4	5000	1-8	1	1	1-1/4	5	4	1/2
IL62-6Gx5	IL62-6Sx5	1000	3/8-16	1/2	3/4	1-1/4	5-3/4	5	3/16
IL62-7Gx5	IL62-7Sx5	2000	1/2-13	1/2	3/4	1-1/4	5-3/4	5	3/16
IL62-8Gx5	IL62-8Sx5	3000	5/8-11	5/8	3/4	1-1/4	5-3/4	5	3/16
IL62-9Gx5	IL62-9Sx5	4000	3/4-10	3/4	3/4	1-1/4	5-3/4	5	3/16
IL62-10Gx5	IL62-10Sx5	5000	1-8	1	1	1-1/4	6	5	1/2
IL62-6Gx6	IL62-6Sx6	1000	3/8-16	1/2	3/4	1-1/4	6-3/4	6	3/16
IL62-7Gx6	IL62-7Sx6	2000	1/2-13	1/2	3/4	1-1/4	6-3/4	6	3/16
IL62-8Gx6	IL62-8Sx6	3000	5/8-11	5/8	3/4	1-1/4	6-3/4	6	3/16
IL62-9Gx6	IL62-9Sx6	4000	3/4-10	3/4	3/4	1-1/4	6-3/4	6	3/16
IL62-10Gx6	IL62-10Sx6	5000	1-8	1	1	1-1/4	7	6	1/2
IL62-7Gx8	IL62-7Sx8	2000	1/2-13	1/2	3/4	1-1/4	8-3/4	8	3/16
IL62-8Gx8	IL62-8Sx8	3000	5/8-11	5/8	3/4	1-1/4	8-3/4	8	3/16
IL62-9Gx8	IL62-9Sx8	4000	3/4-10	3/4	3/4	1-1/4	8-3/4	8	3/16
IL62-10Gx8	IL62-10Sx8	5000	1-8	1	1	1-1/4	9	8	1/2

To order optional top broached hex, "allen drive," add "-BR".



TOGGLE PADS - STUD (SWIVEL SET SCREWS)


The IEC Delrin® Base Stud Toggle Pad features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. Threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provide a low-friction support interface. Standard steel finish is corrosion resistant zinc-plated gold irridite. Other finishes available upon request.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Black delrin available as custom
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Fixtures
- Tooling



white base is delrin® plastic.

TOGGLE PADS (DELTRIN BASE) - STEEL & STAINLESS STEEL STUD

Steel	Stainless	Load	A	B	C	D	E	F	G
IL60-4Gx1-WD	IL60-4Sx1-WD	100	1/4-20	1/2	3/4	3/4	1-3/4	1	3/16
IL60-4Gx15-WD	IL60-4Sx15-WD	100	1/4-20	1/2	3/4	3/4	2-1/4	1-1/2	3/16
IL60-5Gx1-WD	IL60-5Sx1-WD	300	5/16-18	1/2	3/4	3/4	1-3/4	1	3/16
IL60-4G-WD	IL60-4S-WD	100	1/4-20	1/2	3/4	3/4	2-3/4	2	3/16
IL60-5G-WD	IL60-5S-WD	300	5/16-18	1/2	3/4	3/4	2-3/4	2	3/16
IL60-6G-WD	IL60-6S-WD	500	3/8-16	1/2	3/4	3/4	2-3/4	2	3/16
IL60-7G-WD	IL60-7S-WD	750	1/2-13	1/2	3/4	3/4	2-3/4	2	3/16
IL60-8G-WD	IL60-8S-WD	1000	5/8-11	5/8	3/4	3/4	2-3/4	2	3/16
IL60-9G-WD	IL60-9S-WD	1250	3/4-10	3/4	3/4	3/4	2-3/4	2	3/16
IL60-10G-WD	IL60-10S-WD	1500	1-8	1	1	3/4	3	2	1/2
IL60-4Gx3-WD	IL60-4Sx3-WD	100	1/4-20	1/2	3/4	3/4	3-3/4	3	3/16
IL60-5Gx3-WD	IL60-5Sx3-WD	300	5/16-18	1/2	3/4	3/4	3-3/4	3	3/16
IL60-6Gx3-WD	IL60-6Sx3-WD	500	3/8-16	1/2	3/4	3/4	3-3/4	3	3/16
IL60-7Gx3-WD	IL60-7Sx3-WD	750	1/2-13	1/2	3/4	3/4	3-3/4	3	3/16
IL60-8Gx3-WD	IL60-8Sx3-WD	1000	5/8-11	5/8	3/4	3/4	3-3/4	3	3/16
IL60-9Gx3-WD	IL60-9Sx3-WD	1250	3/4-10	3/4	3/4	3/4	3-3/4	3	3/16
IL60-10Gx3-WD	IL60-10Sx3-WD	1500	1-8	1	1	3/4	4	3	1/2
IL60-5Gx4-WD	IL60-5Sx4-WD	300	5/16-18	1/2	3/4	3/4	4-3/4	4	3/16
IL60-6Gx4-WD	IL60-6Sx4-WD	500	3/8-16	1/2	3/4	3/4	4-3/4	4	3/16
IL60-7Gx4-WD	IL60-7Sx4-WD	750	1/2-13	1/2	3/4	3/4	4-3/4	4	3/16
IL60-8Gx4-WD	IL60-8Sx4-WD	1000	5/8-11	5/8	3/4	3/4	4-3/4	4	3/16
IL60-9Gx4-WD	IL60-9Sx4-WD	1250	3/4-10	3/4	3/4	3/4	4-3/4	4	3/16
IL60-10Gx4-WD	IL60-10Sx4-WD	1500	1-8	1	1	3/4	5	4	1/2
IL60-6Gx5-WD	IL60-6Sx5-WD	500	3/8-16	1/2	3/4	3/4	5-3/4	5	3/16
IL60-7Gx5-WD	IL60-7Sx5-WD	750	1/2-13	1/2	3/4	3/4	5-3/4	5	3/16
IL60-8Gx5-WD	IL60-8Sx5-WD	1000	5/8-11	5/8	3/4	3/4	5-3/4	5	3/16
IL60-9Gx5-WD	IL60-9Sx5-WD	1250	3/4-10	3/4	3/4	3/4	5-3/4	5	3/16
IL60-10Gx5-WD	IL60-10Sx5-WD	1500	1-8	1	1	3/4	6	5	1/2
IL60-6Gx6-WD	IL60-6Sx6-WD	500	3/8-16	1/2	3/4	3/4	6-3/4	6	3/16
IL60-7Gx6-WD	IL60-7Sx6-WD	750	1/2-13	1/2	3/4	3/4	6-3/4	6	3/16
IL60-8Gx6-WD	IL60-8Sx6-WD	1000	5/8-11	5/8	3/4	3/4	6-3/4	6	3/16
IL60-9Gx6-WD	IL60-9Sx6-WD	1250	3/4-10	3/4	3/4	3/4	6-3/4	6	3/16
IL60-10Gx6-WD	IL60-10Sx6-WD	1500	1-8	1	1	3/4	7	6	1/2
IL60-7Gx8-WD	IL60-7Sx8-WD	750	1/2-13	1/2	3/4	3/4	8-3/4	8	3/16
IL60-8Gx8-WD	IL60-8Sx8-WD	1000	5/8-11	5/8	3/4	3/4	8-3/4	8	3/16
IL60-9Gx8-WD	IL60-9Sx8-WD	1250	3/4-10	3/4	3/4	3/4	8-3/4	8	3/16
IL60-10Gx8-WD	IL60-10Sx8-WD	1500	1-8	1	1	3/4	9	8	1/2

To order optional top broached hex, "allen drive," add "-BR".



TOGGLE PADS - STUD (SWIVEL SET SCREWS)


The IEC Delrin® Base Stud Toggle Pad features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. Threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provide a low-friction support interface. Standard steel finish is corrosion resistant zinc-plated gold irridite. Other finishes available upon request.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Black delrin available as custom
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Fixtures
- Tooling



white base is delrin® plastic.

TOGGLE PADS (DELRIN BASE) - STEEL & STAINLESS STEEL STUD

Steel	Stainless	Load	A	B	C	D	E	F	G
IL62-4Gx1-WD	IL62-4Sx1-WD	100	1/4-20	1/2	3/4	1-1/4	1-3/4	1	3/16
IL62-4Gx15-WD	IL62-4Sx15-WD	100	1/4-20	1/2	3/4	1-1/4	2-1/4	1-1/2	3/16
IL62-5Gx1-WD	IL62-5Sx1-WD	300	5/16-18	1/2	3/4	1-1/4	1-3/4	1	3/16
IL62-4G-WD	IL62-4S-WD	100	1/4-20	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-5G-WD	IL62-5S-WD	300	5/16-18	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-6G-WD	IL62-6S-WD	500	3/8-16	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-7G-WD	IL62-7S-WD	750	1/2-13	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-8G-WD	IL62-8S-WD	1000	5/8-11	5/8	3/4	1-1/4	2-3/4	2	3/16
IL62-9G-WD	IL62-9S-WD	1250	3/4-10	3/4	3/4	1-1/4	2-3/4	2	3/16
IL62-10G-WD	IL62-10S-WD	1500	1-8	1	1	1-1/4	3	2	1/2
IL62-4Gx3-WD	IL62-4Sx3-WD	100	1/4-20	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-5Gx3-WD	IL62-5Sx3-WD	300	5/16-18	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-6Gx3-WD	IL62-6Sx3-WD	500	3/8-16	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-7Gx3-WD	IL62-7Sx3-WD	750	1/2-13	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-8Gx3-WD	IL62-8Sx3-WD	1000	5/8-11	5/8	3/4	1-1/4	3-3/4	3	3/16
IL62-9Gx3-WD	IL62-9Sx3-WD	1250	3/4-10	3/4	3/4	1-1/4	3-3/4	3	3/16
IL62-10Gx3-WD	IL62-10Sx3-WD	1500	1-8	1	1	1-1/4	4	3	1/2
IL62-5Gx4-WD	IL62-5Sx4-WD	300	5/16-18	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-6Gx4-WD	IL62-6Sx4-WD	500	3/8-16	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-7Gx4-WD	IL62-7Sx4-WD	750	1/2-13	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-8Gx4-WD	IL62-8Sx4-WD	1000	5/8-11	5/8	3/4	1-1/4	4-3/4	4	3/16
IL62-9Gx4-WD	IL62-9Sx4-WD	1250	3/4-10	3/4	3/4	1-1/4	4-3/4	4	3/16
IL62-10Gx4-WD	IL62-10Sx4-WD	1500	1-8	1	1	1-1/4	5	4	1/2
IL62-6Gx5-WD	IL62-6Sx5-WD	500	3/8-16	1/2	3/4	1-1/4	5-3/4	5	3/16
IL62-7Gx5-WD	IL62-7Sx5-WD	750	1/2-13	1/2	3/4	1-1/4	5-3/4	5	3/16
IL62-8Gx5-WD	IL62-8Sx5-WD	1000	5/8-11	5/8	3/4	1-1/4	5-3/4	5	3/16
IL62-9Gx5-WD	IL62-9Sx5-WD	1250	3/4-10	3/4	3/4	1-1/4	5-3/4	5	3/16
IL62-10Gx5-WD	IL62-10Sx5-WD	1500	1-8	1	1	1-1/4	6	5	1/2
IL62-6Gx6-WD	IL62-6Sx6-WD	500	3/8-16	1/2	3/4	1-1/4	6-3/4	6	3/16
IL62-7Gx6-WD	IL62-7Sx6-WD	750	1/2-13	1/2	3/4	1-1/4	6-3/4	6	3/16
IL62-8Gx6-WD	IL62-8Sx6-WD	1000	5/8-11	5/8	3/4	1-1/4	6-3/4	6	3/16
IL62-9Gx6-WD	IL62-9Sx6-WD	1250	3/4-10	3/4	3/4	1-1/4	6-3/4	6	3/16
IL62-10Gx6-WD	IL62-10Sx6-WD	1500	1-8	1	1	1-1/4	7	6	1/2
IL62-7Gx8-WD	IL62-7Sx8-WD	750	1/2-13	1/2	3/4	1-1/4	8-3/4	8	3/16
IL62-8Gx8-WD	IL62-8Sx8-WD	1000	5/8-11	5/8	3/4	1-1/4	8-3/4	8	3/16
IL62-9Gx8-WD	IL62-9Sx8-WD	1250	3/4-10	3/4	3/4	1-1/4	8-3/4	8	3/16
IL62-10Gx8-WD	IL62-10Sx8-WD	1500	1-8	1	1	1-1/4	9	8	1/2

To order optional top broached hex, "allen drive," add "-BR".



METRIC TOGGLE PADS / SWIVEL SET SCREWS


The IEC Metric Toggle Pads (Swivel Set Screws) feature an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. Integrated ball and swivel provide a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Work tables
- Display racks
- Fixtures
- Tooling



LOW PROFILE - METRIC STEEL & STAINLESS STEEL

Steel	Stainless	Load	A	B	C	D	E	F	G
IL60-M6Gx1	IL60-M6Sx1	100	M6x1	1/2	3/4	3/4	2-3/4	1	3/16
IL60-M8Gx1	IL60-M8Sx1	500	M8x1.25	1/2	3/4	3/4	2-3/4	1	3/16
IL60-M6G	IL60-M6S	100	M6x1	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M8G	IL60-M8S	500	M8x1.25	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M10G	IL60-M10S	1000	M10x1.50	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M12G	IL60-M12S	2000	M12x1.75	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M16G	IL60-M16S	3000	M16x2.00	5/8	3/4	3/4	2-3/4	2	3/16
IL60-M20G	IL60-M20S	4000	M20x2.50	3/4	3/4	3/4	2-3/4	2	3/16
IL60-M24G	IL60-M24S	5000	M24x3.00	1	1	3/4	3	2	1/2
IL60-M8Gx3	IL60-M8Sx3	500	M8x1.25	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M10Gx3	IL60-M10Sx3	1000	M10x1.50	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M12Gx3	IL60-M12Sx3	2000	M12x1.75	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M16Gx3	IL60-M16Sx3	3000	M16x2.00	5/8	3/4	3/4	3-3/4	3	3/16
IL60-M20Gx3	IL60-M20Sx3	4000	M20x2.50	3/4	3/4	3/4	3-3/4	3	3/16
IL60-M24Gx3	IL60-M24Sx3	5000	M24x3.00	1	1	3/4	4	3	1/2
IL60-M8Gx4	IL60-M8Sx4	500	M8x1.25	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M10Gx4	IL60-M10Sx4	1000	M10x1.50	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M12Gx4	IL60-M12Sx4	2000	M12x1.75	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M16Gx4	IL60-M16Sx4	3000	M16x2.00	5/8	3/4	3/4	4-3/4	4	3/16
IL60-M20Gx4	IL60-M20Sx4	4000	M20x2.50	3/4	3/4	3/4	4-3/4	4	3/16
IL60-M24Gx4	IL60-M24Sx4	5000	M24x3.00	1	1	3/4	5	4	1/2
IL60-M10Gx5	IL60-M10Sx5	1000	M10x1.50	1/2	3/4	3/4	5-3/4	5	3/16
IL60-M12Gx5	IL60-M12Sx5	2000	M12x1.75	1/2	3/4	3/4	5-3/4	5	3/16
IL60-M16Gx5	IL60-M16Sx5	3000	M16x2.00	5/8	3/4	3/4	5-3/4	5	3/16
IL60-M20Gx5	IL60-M20Sx5	4000	M20x2.50	3/4	3/4	3/4	5-3/4	5	3/16
IL60-M24Gx5	IL60-M24Sx5	5000	M24x3.00	1	1	3/4	6	5	1/2
IL60-M10Gx6	IL60-M10Sx6	1000	M10x1.50	1/2	3/4	3/4	6-3/4	6	3/16
IL60-M12Gx6	IL60-M12Sx6	2000	M12x1.75	1/2	3/4	3/4	6-3/4	6	3/16
IL60-M16Gx6	IL60-M16Sx6	3000	M16x2.00	5/8	3/4	3/4	6-3/4	6	3/16
IL60-M20Gx6	IL60-M20Sx6	4000	M20x2.50	3/4	3/4	3/4	6-3/4	6	3/16
IL60-M24Gx6	IL60-M24Sx6	5000	M24x3.00	1	1	3/4	7	6	1/2
IL60-M12Gx8	IL60-M12Sx8	2000	M12x1.75	1/2	3/4	3/4	8-3/4	8	3/16
IL60-M16Gx8	IL60-M16Sx8	3000	M16x2.00	5/8	3/4	3/4	8-3/4	8	3/16
IL60-M20Gx8	IL60-M20Sx8	4000	M20x2.50	3/4	3/4	3/4	8-3/4	8	3/16
IL60-M24Gx8	IL60-M24Sx8	5000	M24x3.00	1	1	3/4	9	8	1/2

To order with 1/8" black rubber pad, (add "-P"). To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



METRIC TOGGLE PADS / SWIVEL SET SCREWS


The IEC Metric Toggle Pads (Swivel Set Screws) feature an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. Integrated ball and swivel socket provide a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Work tables
- Display racks
- Fixtures
- Tooling



LOW PROFILE - METRIC STEEL & STAINLESS STEEL

Steel	Stainless	Load	A	B	C	D	E	F	G
IL62-M6Gx1	IL62-M6Sx1	100	M6x1	1/2	3/4	1-1/4	2-3/4	1	3/16
IL62-M8Gx1	IL62-M8Sx1	500	M8x1.25	1/2	3/4	1-1/4	2-3/4	1	3/16
IL62-M6G	IL62-M6S	100	M6x1	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M8G	IL62-M8S	500	M8x1.25	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M10G	IL62-M10S	1000	M10x1.50	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M12G	IL62-M12S	2000	M12x1.75	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M16G	IL62-M16S	3000	M16x2.00	5/8	3/4	1-1/4	2-3/4	2	3/16
IL62-M20G	IL62-M20S	4000	M20x2.50	3/4	3/4	1-1/4	2-3/4	2	3/16
IL62-M24G	IL62-M24S	5000	M24x3.00	1	1	1-1/4	3	2	1/2
IL62-M8Gx3	IL62-M8Sx3	500	M8x1.25	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-M10Gx3	IL62-M10Sx3	1000	M10x1.50	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-M12Gx3	IL62-M12Sx3	2000	M12x1.75	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-M16Gx3	IL62-M16Sx3	3000	M16x2.00	5/8	3/4	1-1/4	3-3/4	3	3/16
IL62-M20Gx3	IL62-M20Sx3	4000	M20x2.50	3/4	3/4	1-1/4	3-3/4	3	3/16
IL62-M24Gx3	IL62-M24Sx3	5000	M24x3.00	1	1	1-1/4	4	3	1/2
IL62-M8Gx4	IL62-M8Sx4	500	M8x1.25	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-M10Gx4	IL62-M10Sx4	1000	M10x1.50	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-M12Gx4	IL62-M12Sx4	2000	M12x1.75	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-M16Gx4	IL62-M16Sx4	3000	M16x2.00	5/8	3/4	1-1/4	4-3/4	4	3/16
IL62-M20Gx4	IL62-M20Sx4	4000	M20x2.50	3/4	3/4	1-1/4	4-3/4	4	3/16
IL62-M24Gx4	IL62-M24Sx4	5000	M24x3.00	1	1	1-1/4	5	4	1/2
IL62-M10Gx5	IL62-M10Sx5	1000	M10x1.50	1/2	3/4	1-1/4	5-3/4	5	3/16
IL62-M12Gx5	IL62-M12Sx5	2000	M12x1.75	1/2	3/4	1-1/4	5-3/4	5	3/16
IL62-M16Gx5	IL62-M16Sx5	3000	M16x2.00	5/8	3/4	1-1/4	5-3/4	5	3/16
IL62-M20Gx5	IL62-M20Sx5	4000	M20x2.50	3/4	3/4	1-1/4	5-3/4	5	3/16
IL62-M24Gx5	IL62-M24Sx5	5000	M24x3.00	1	1	1-1/4	6	5	1/2
IL62-M10Gx6	IL62-M10Sx6	1000	M10x1.50	1/2	3/4	1-1/4	6-3/4	6	3/16
IL62-M12Gx6	IL62-M12Sx6	2000	M12x1.75	1/2	3/4	1-1/4	6-3/4	6	3/16
IL62-M16Gx6	IL62-M16Sx6	3000	M16x2.00	5/8	3/4	1-1/4	6-3/4	6	3/16
IL62-M20Gx6	IL62-M20Sx6	4000	M20x2.50	3/4	3/4	1-1/4	6-3/4	6	3/16
IL62-M24Gx6	IL62-M24Sx6	5000	M24x3.00	1	1	1-1/4	7	6	1/2
IL62-M12Gx8	IL62-M12Sx8	2000	M12x1.75	1/2	3/4	1-1/4	8-3/4	8	3/16
IL62-M16Gx8	IL62-M16Sx8	3000	M16x2.00	5/8	3/4	1-1/4	8-3/4	8	3/16
IL62-M20Gx8	IL62-M20Sx8	4000	M20x2.50	3/4	3/4	1-1/4	8-3/4	8	3/16
IL62-M24Gx8	IL62-M24Sx8	5000	M24x3.00	1	1	1-1/4	9	8	1/2

To order with 1/8" black rubber pad, (add "-P"). To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



TOGGLE PADS - METRIC STUD (SWIVEL SET SCREWS)


The IEC Metric Delrin® Base Stud Toggle Pad features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. The threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provide a low-friction support interface. Standard steel finish is corrosion resistant zinc-plated gold irridite. Other finishes available upon request.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Black delrin available as custom
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Fixtures
- Tooling



white base is delrin® plastic.

LOW PROFILE - METRIC (DELRIN BASE) STEEL & STAINLESS STEEL

Steel	Stainless	Load	A	B	C	D	E	F	G
IL60-M6Gx1-WD	IL60-M6Sx1-WD	100	M6x1	1/2	3/4	3/4	2-3/4	1	3/16
IL60-M8Gx1-WD	IL60-M8Sx1-WD	300	M8x1.25	1/2	3/4	3/4	2-3/4	1	3/16
IL60-M6G-WD	IL60-M6S-WD	100	M6x1	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M8G-WD	IL60-M8S-WD	300	M8x1.25	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M10G-WD	IL60-M10S-WD	500	M10x1.50	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M12G-WD	IL60-M12S-WD	750	M12x1.75	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M16G-WD	IL60-M16S-WD	1000	M16x2.00	5/8	3/4	3/4	2-3/4	2	3/16
IL60-M20G-WD	IL60-M20S-WD	1250	M20x2.50	3/4	3/4	3/4	2-3/4	2	3/16
IL60-M24G-WD	IL60-M24S-WD	1500	M24x3.00	1	1	3/4	3	2	1/2
IL60-M8Gx3-WD	IL60-M8Sx3-WD	300	M8x1.25	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M10Gx3-WD	IL60-M10Sx3-WD	500	M10x1.50	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M12Gx3-WD	IL60-M12Sx3-WD	750	M12x1.75	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M16Gx3-WD	IL60-M16Sx3-WD	1000	M16x2.00	5/8	3/4	3/4	3-3/4	3	3/16
IL60-M20Gx3-WD	IL60-M20Sx3-WD	1250	M20x2.50	3/4	3/4	3/4	3-3/4	3	3/16
IL60-M24Gx3-WD	IL60-M24Sx3-WD	1500	M24x3.00	1	1	3/4	4	3	1/2
IL60-M8Gx4-WD	IL60-M8Sx4-WD	300	M8x1.25	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M10Gx4-WD	IL60-M10Sx4-WD	500	M10x1.50	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M12Gx4-WD	IL60-M12Sx4-WD	750	M12x1.75	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M16Gx4-WD	IL60-M16Sx4-WD	1000	M16x2.00	5/8	3/4	3/4	4-3/4	4	3/16
IL60-M20Gx4-WD	IL60-M20Sx4-WD	1250	M20x2.50	3/4	3/4	3/4	4-3/4	4	3/16
IL60-M24Gx4-WD	IL60-M24Sx4-WD	1500	M24x3.00	1	1	3/4	5	4	1/2
IL60-M10Gx5-WD	IL60-M10Sx5-WD	500	M10x1.50	1/2	3/4	3/4	5-3/4	5	3/16
IL60-M12Gx5-WD	IL60-M12Sx5-WD	750	M12x1.75	1/2	3/4	3/4	5-3/4	5	3/16
IL60-M16Gx5-WD	IL60-M16Sx5-WD	1000	M16x2.00	5/8	3/4	3/4	5-3/4	5	3/16
IL60-M20Gx5-WD	IL60-M20Sx5-WD	1250	M20x2.50	3/4	3/4	3/4	5-3/4	5	3/16
IL60-M24Gx5-WD	IL60-M24Sx5-WD	1500	M24x3.00	1	1	3/4	6	5	1/2
IL60-M10Gx6-WD	IL60-M10Sx6-WD	500	M10x1.50	1/2	3/4	3/4	6-3/4	6	3/16
IL60-M12Gx6-WD	IL60-M12Sx6-WD	750	M12x1.75	1/2	3/4	3/4	6-3/4	6	3/16
IL60-M16Gx6-WD	IL60-M16Sx6-WD	1000	M16x2.00	5/8	3/4	3/4	6-3/4	6	3/16
IL60-M20Gx6-WD	IL60-M20Sx6-WD	1250	M20x2.50	3/4	3/4	3/4	6-3/4	6	3/16
IL60-M24Gx6-WD	IL60-M24Sx6-WD	1500	M24x3.00	1	1	3/4	7	6	1/2
IL60-M12Gx8-WD	IL60-M12Sx8-WD	750	M12x1.75	1/2	3/4	3/4	8-3/4	8	3/16
IL60-M16Gx8-WD	IL60-M16Sx8-WD	1000	M16x2.00	5/8	3/4	3/4	8-3/4	8	3/16
IL60-M20Gx8-WD	IL60-M20Sx8-WD	1250	M20x2.50	3/4	3/4	3/4	8-3/4	8	3/16
IL60-M24Gx8-WD	IL60-M24Sx8-WD	1500	M24x3.00	1	1	3/4	9	8	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



TOGGLE PADS - METRIC STUD (SWIVEL SET SCREWS)


The IEC Metric Delrin® Base Stud Toggle Pad features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. The threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provide a low-friction support interface. Standard steel finish is corrosion resistant zinc-plated gold irridite. Other finishes available upon request.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Black delrin available as custom
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Fixtures
- Tooling



white base is delrin® plastic.

LOW PROFILE - METRIC STEEL & STAINLESS STEEL

Steel	Stainless	Load	A	B	C	D	E	F	G
IL62-M6Gx1-WD	IL62-M6Sx1-WD	100	M6x1	1/2	3/4	1-1/4	2-3/4	1	3/16
IL62-M8Gx1-WD	IL62-M8Sx1-WD	300	M8x1.25	1/2	3/4	1-1/4	2-3/4	1	3/16
IL62-M6G-WD	IL62-M6S-WD	100	M6x1	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M8G-WD	IL62-M8S-WD	300	M8x1.25	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M10G-WD	IL62-M10S-WD	500	M10x1.50	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M12G-WD	IL62-M12S-WD	750	M12x1.75	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M16G-WD	IL62-M16S-WD	1000	M16x2.00	5/8	3/4	1-1/4	2-3/4	2	3/16
IL62-M20G-WD	IL62-M20S-WD	1250	M20x2.50	3/4	3/4	1-1/4	2-3/4	2	3/16
IL62-M24G-WD	IL62-M24S-WD	1500	M24x3.00	1	1	1-1/4	3	2	1/2
IL62-M8Gx3-WD	IL62-M8Sx3-WD	300	M8x1.25	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-M10Gx3-WD	IL62-M10Sx3-WD	500	M10x1.50	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-M12Gx3-WD	IL62-M12Sx3-WD	750	M12x1.75	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-M16Gx3-WD	IL62-M16Sx3-WD	1000	M16x2.00	5/8	3/4	1-1/4	3-3/4	3	3/16
IL62-M20Gx3-WD	IL62-M20Sx3-WD	1250	M20x2.50	3/4	3/4	1-1/4	3-3/4	3	3/16
IL62-M24Gx3-WD	IL62-M24Sx3-WD	1500	M24x3.00	1	1	1-1/4	4	3	1/2
IL62-M8Gx4-WD	IL62-M8Sx4-WD	300	M8x1.25	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-M10Gx4-WD	IL62-M10Sx4-WD	500	M10x1.50	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-M12Gx4-WD	IL62-M12Sx4-WD	750	M12x1.75	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-M16Gx4-WD	IL62-M16Sx4-WD	1000	M16x2.00	5/8	3/4	1-1/4	4-3/4	4	3/16
IL62-M20Gx4-WD	IL62-M20Sx4-WD	1250	M20x2.50	3/4	3/4	1-1/4	4-3/4	4	3/16
IL62-M24Gx4-WD	IL62-M24Sx4-WD	1500	M24x3.00	1	1	1-1/4	5	4	1/2
IL62-M10Gx5-WD	IL62-M10Sx5-WD	500	M10x1.50	1/2	3/4	1-1/4	5-3/4	5	3/16
IL62-M12Gx5-WD	IL62-M12Sx5-WD	750	M12x1.75	1/2	3/4	1-1/4	5-3/4	5	3/16
IL62-M16Gx5-WD	IL62-M16Sx5-WD	1000	M16x2.00	5/8	3/4	1-1/4	5-3/4	5	3/16
IL62-M20Gx5-WD	IL62-M20Sx5-WD	1250	M20x2.50	3/4	3/4	1-1/4	5-3/4	5	3/16
IL62-M24Gx5-WD	IL62-M24Sx5-WD	1500	M24x3.00	1	1	1-1/4	6	5	1/2
IL62-M10Gx6-WD	IL62-M10Sx6-WD	500	M10x1.50	1/2	3/4	1-1/4	6-3/4	6	3/16
IL62-M12Gx6-WD	IL62-M12Sx6-WD	750	M12x1.75	1/2	3/4	1-1/4	6-3/4	6	3/16
IL62-M16Gx6-WD	IL62-M16Sx6-WD	1000	M16x2.00	5/8	3/4	1-1/4	6-3/4	6	3/16
IL62-M20Gx6-WD	IL62-M20Sx6-WD	1250	M20x2.50	3/4	3/4	1-1/4	6-3/4	6	3/16
IL62-M24Gx6-WD	IL62-M24Sx6-WD	1500	M24x3.00	1	1	1-1/4	7	6	1/2
IL62-M12Gx8-WD	IL62-M12Sx8-WD	750	M12x1.75	1/2	3/4	1-1/4	8-3/4	8	3/16
IL62-M16Gx8-WD	IL62-M16Sx8-WD	1000	M16x2.00	5/8	3/4	1-1/4	8-3/4	8	3/16
IL62-M20Gx8-WD	IL62-M20Sx8-WD	1250	M20x2.50	3/4	3/4	1-1/4	8-3/4	8	3/16
IL62-M24Gx8-WD	IL62-M24Sx8-WD	1500	M24x3.00	1	1	1-1/4	9	8	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm